ELITE
SOLUTIONS

We don't just sell products we provide solutions.



Dealer, Distributor & Stockist of :

ZOLOTO® VALVES

KARTAR® VALVES

pennant® LEAD THE WAY

L&T Valves

NEWAGE® FIRE FIGHTING CO. LTD.

Baumer
Passion for Sensors



About us:

We are pleased to introduce ourselves as one of the leading authorised distributor and stockists of Valves, Steam Traps, Pipe Fittings, Measuring Instruments and Fire Fighting Products

- Valves - Ball, Butterfly, Air Release, Check, Sluice, Strainer Etc.
- Moc- CI, Bronze, CS, SS, DI, FS
- Steam Traps - Ball, Float, TD
- Pipe Fitting - MS, GI, SS, Grooved
- Measuring Instruments - RTD, Thermocouple, Flowmeter Etc.


ZOLOTO® VALVES

एनटीपीसी NTPC | GMR | Ambuja Cement | MP BIRLA GROUP | adani Power | FinOlex PIPES

ELITE SOLUTIONS



Bronze Globe Valve Screwed / Flange
Size Range : 8mm to 100mm

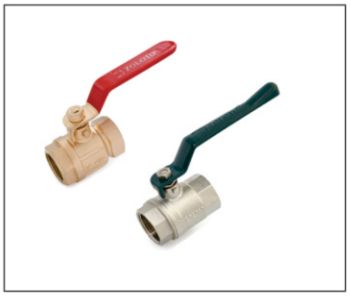

Forged Brass / Gunmetal Ball Valve (Screwed)
Size Range : 8mm to 100mm



Check Valve Vertical / Horizontal Screwed / Flange
Size Range : 15mm to 100mm



Bronze Compact Pressure Reducing Valve (Screwed)
Size Range : 15mm to 100mm



Three Piece Design Ball Valve
Size Range : 15mm to 100mm



Cast Iron Dual Plate Wafer Type Check Valve, PN 16
Size Range : 40mm to 300mm



Bronze Union Bonnet Globe Valve Screwed / Flange
Size Range : 15mm to 100mm



Globe Valve CS & CI (Flanged)
Size Range : 15mm to 200mm



Y-Type Strainer PN-10/16
Size Range : 40mm to 300mm



Cast Iron Non Return Valve PN-1.0/1.6 (Flanged)
Size Range : 2" to 12"



Cast Iron Ball Valve (screwed) K-801
Size Range : 40mm to 600mm
Operation-Hand Lever / Gear / Electrical / Pneumatic / Motorized



Sluice Valve (Flanged) PN10/16
Size Range : 50mm to 600mm



Thermodynamic Steam Trap
Size Range : 15mm to 25mm



Balancing Valve Screwed / Flange
Size Range : 15mm to 300mm



CastSteel Gate Valve Class 150 (Flanged)
Size Range : 40mm to 200mm



Parallel Slide Blow Off Valve (Flanged) Bronze / Cast Steel
Size Range : 25mm to 50mm

KARTAR VALVES

एनटीपीसी NTPC | BARC | पावरग्रिड POWERGRID

ELITE SOLUTIONS




Air Release Valve Ci Single Orifice Flanged



Kinetic Air Valve (C.i. Double Orifice)



Cast Iron Ball Valve (screwed) K-801



GM Ball Valve



GM Globe Valve



Horizontal Check Valve



Pressure Reducing Valve



SS Ball Valve



Vertical Check Valve



Butterfly Valve Double Flang



Butterfly Valve Double Flang



Ball Type Foot Valve



CI Y type Strainer



DI Y Type Strainer



T- Type Strainer




CI Sluice Valve Non Rising Stem




CI Sluice Valve OS&'Y' Type



DI Sluice Valve




Check Valve Dual Plate



Check Valve Flanged Type



Check Valve Single Plate



CI Non Return Valve



DI Non Return Valve



Resilient Seated Gate Valve Rising Stem



Resilient Seated Gate Valve

pennant

एनटीपीसी NTPC · GMR · Ambuja Cement · MP Birla Group · adani Power · FinOlex PIPES

ELITE SOLUTIONS



Thermodynamic Steam Traps



Ball Float Steam Traps



Inverted Bucket Steam Trap



Thermostatic Steam Traps



Clean Room Steam Traps



Thermostatic Air Vent, Vacuum Breaker



Non-Slam Check Valve



Y-Type Stainers



Liquid Drain Traps



Piston Valves



Pressure Reducing Station



Condensate Lifting Pump

L&T Valves

ELITE SOLUTIONS



Gate Valves

Size : 2" to 72" (50 mm to 1800 mm)
ASME Class : Class 150 to 2500
Design Standard : API 600, API 603, ASME B 16.34



Globe Valves

Size : 2" to 20" (50 mm to 500 mm)
ASME Class : Class 150 to 2500
Design Standard : API 623, BS 1873, ASME B 16.34



Check Valves

Size : 2" to 48" (50 mm to 1200 mm)
ASME Class : Class 150 to 2500
Design Standard : BS 1868, API 594, ASME B 16.34



Bellow-Sealed Valves

Size : Gate Valves : 2" to 30" (50 mm to 750 mm)
Globe Valves : 2" to 12" (50 mm to 300 mm)
ASME Class : Class 150 to 600
Design Std. : API 600 (Gate), API 623 (Globe), MSS SP-117



Small Bore Valves

Size : ¼" to 2" (8 mm to 50 mm)
ASME Class : Class 150 to 1500
Design Std. : API 602, BS 5352,
ASME B16.34, BS 6364, MSS SP84



Small Bore Valves (Up to #4500)

Size : ½" to 2" (8 mm to 50 mm)
ASME Class : Class 1500 to 4500
Design Standards : ASME B16.34



Butterfly Valves

Size :2" to 36" (50 mm to 900 mm)
Pressure Rating : PN10, PN16, PN25, Class 150
Design Standard: API 609 Cat A, EN 593 (BS 5155), MSS SP 67



Floating Ball Valves

Size : ¼" to 8" (8 mm to 200 mm)
ASME Class : Class 150 to 2500
Design Standard : ISO 17292, API 608, API 6D



Dual-Plate Check Valves

Size : 2" to 12" (50 mm to 300 mm)
Pressure Rating : PN10, PN16, Class 125
Design Standard : API 594

Fire Fighting Products

ELITE SOLUTIONS



Single Landing Valves
SS & GM



Branch Pipe with Nozzle
SS & GM




Check Valve Vertical /
Horizontal Screwed / Flange



Bronze Compact Pressure
Reducing Valve (Screwed)



Three Piece Design
Ball Valve

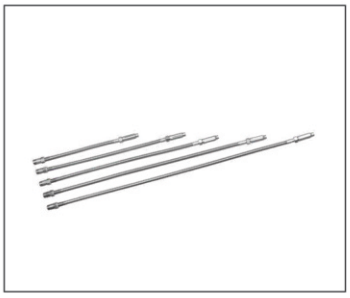

SS Flexible Hose
Unbraided



SS Flexible Hose
Braided



Forged Brass Sprinkler
Pendant



Forged Brass Sprinkler
Side Wall



Forged Brass Sprinkler
Upright



Cast Iron Ball Valve
(screwed) K-801



Fire Extinguishers
Dry Powder Type (ABC)



Hose Box (Single Door)
15Mtrs. / 13Mtrs.



Hose Box
(Double Door)




Thermoplast Hose
Pipe




Hose


PIPE FITTINGS



FLANGE




90° BEND




TEE



LONG BEND



HEX NIPPLE



REDUCER



45° BEND



WNRF FLANGE



SORF FLANGE



PLUG



BLIND



WELD NECK

PRESSURE & TEMPERATURE GAUGES











DIAL SIZE : 50 MM TO 250 MM - RANGE : ON REQUEST
ALSO AVAILABLE WITH GLYCERINE FILLED

SYPHONE PIPE
& COCK

Registered Address :
A-1104, Moraj Waterfall Gateway,
Mihan, Nagpur - 441108

Office Address :
Plot No. 37, Mauli Nagar, Katol
Bypass Road, Wadi, Nagpur -440023.

+91 9021522247
sales@elitesolutions.co.in

ELITE
SOLUTIONS

Design & Print by: AJANTA PRINTPACK PVT. LTD. #9373728082